

Risør 3x4M

309726







Montering:












- Anbefales minimum 3 personer.
- Følg monteringsanvisning.
- Må monteres i vater både horisontalt og vertikalt.
- Avstand mellom søyler må være lik oppe og nede.
- Søylen må festes til et jevnt og stabilt underlag











Vedlikehold:

- Tak lameller må stå i loddrett åpen posisjon gjennom vinteren.
- Ved snøfall bør man ha tilsyn med pergola og fjerne eventuelt tung snø som legger seg på den.

VIKTIG, ikke bruk håndsveiven for og justere lameller på vinteren, det er deler som kan være fosset fast pga. kulde, og kan dermed ødelegges

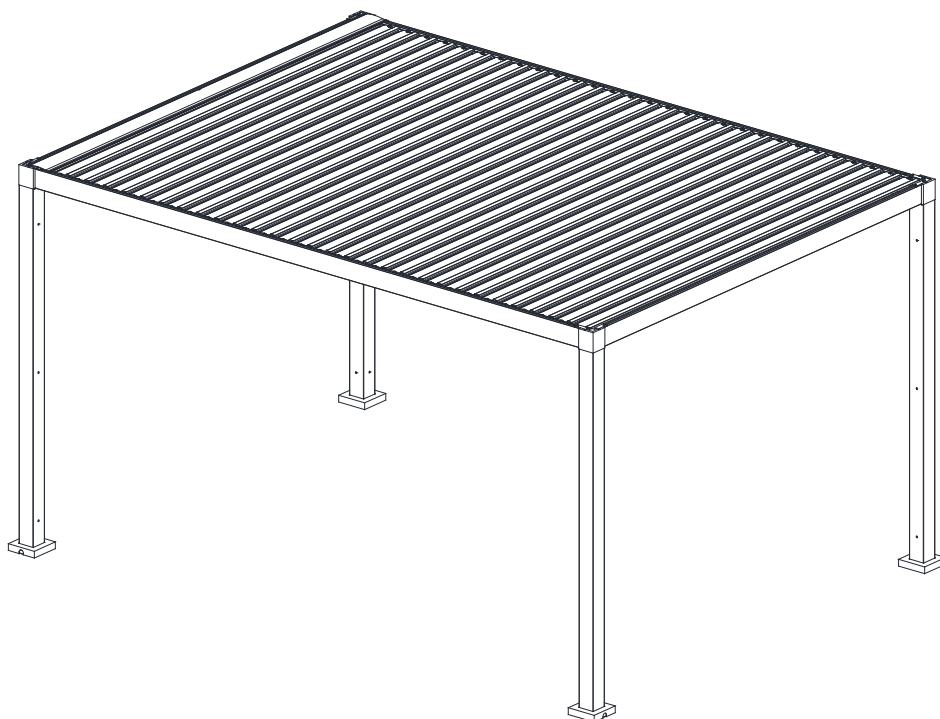

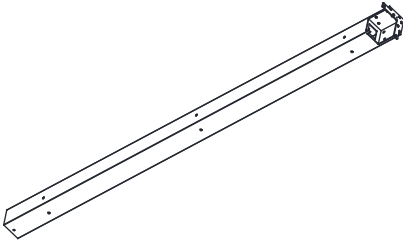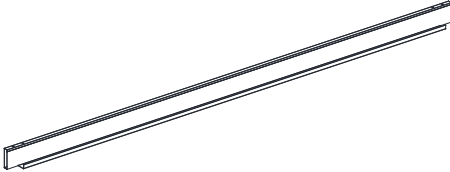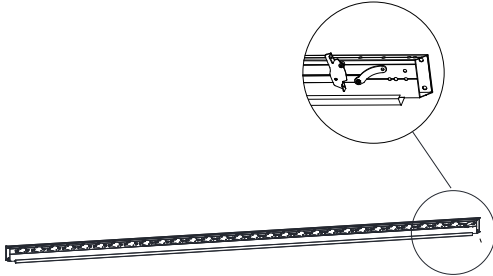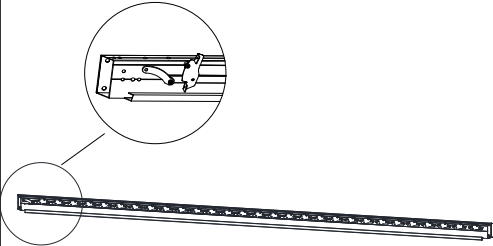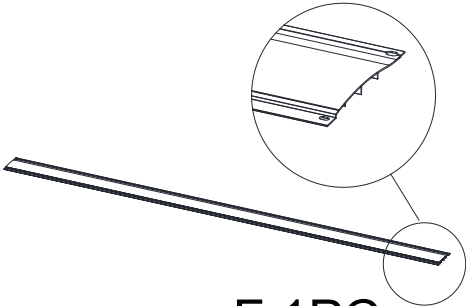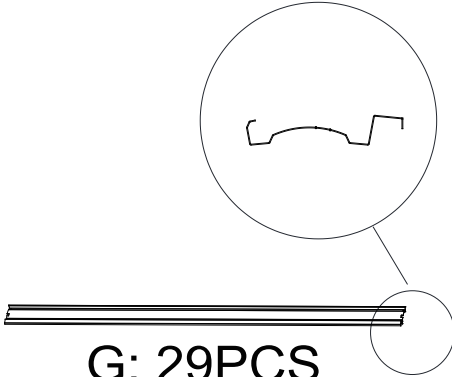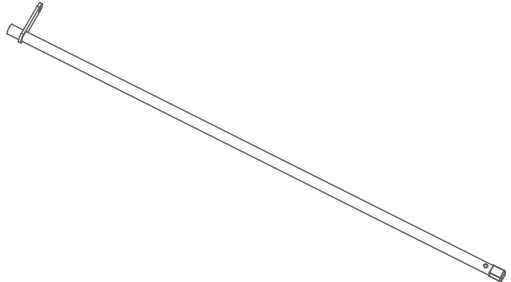 A:4PCS	 B:1PC	 C:1PC	 D:1PC
 E:1PC	 F:1PC	 G: 29PCS	 H1: 1PC
 H2: 1PC	 I:1PC	 J: 4PCS	 K: 4PCS

 L1:1PC	 L2:1PC	 M:1PC	 N:4PCS
 O:1PC	 AA:M6*15MM*36PCS	 BB:M8*20MM*32PCS	 CC:M6*10MM*2PCS
 DD:M5*8MM*116PCS	 EE*2PCS	 FF:M6*25MM*4PCS	 GG:16PCS



HH:(ϕ 16* ϕ 6.5*1) 42PCS




II:(ϕ 20* ϕ 8.5*1) 2PCS



JJ:2PCS



KK:4PCS



LL: M5*15MM*8PCS



MM:1PCS-3#



NN:1PC-4#




OO:1PC-5#




QQ:1PC

The drawing shows a vertical pole assembly. The main view on the left is a long pole labeled 'A' with a base labeled 'K'. A circular callout at the bottom left shows a detailed view of the base 'K' where the pole 'A' is attached. A circular callout on the right shows a detailed view of the top connection. In this view, a vertical pole section labeled 'A' is shown above a square flange labeled 'K'. Below the flange is a mounting plate labeled 'J'. An upward arrow indicates the pole is inserted into the flange. Below this, a downward arrow indicates the assembly is secured. The bottom view shows the pole section labeled 'A1/A2' inserted into the flange 'K', which is mounted on the plate 'J'. Two sets of fasteners, labeled 'AA' (bolts) and 'FF' (washers), are shown securing the plate 'J' to the base.

2

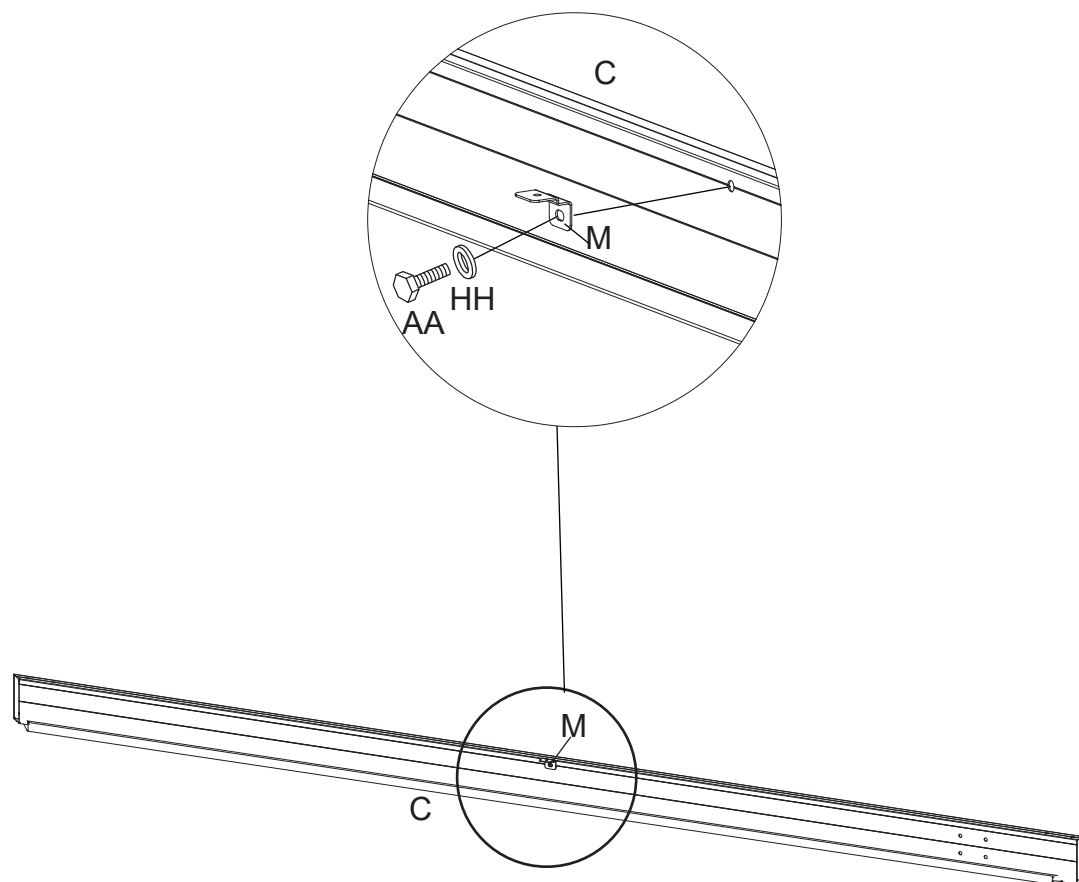

3

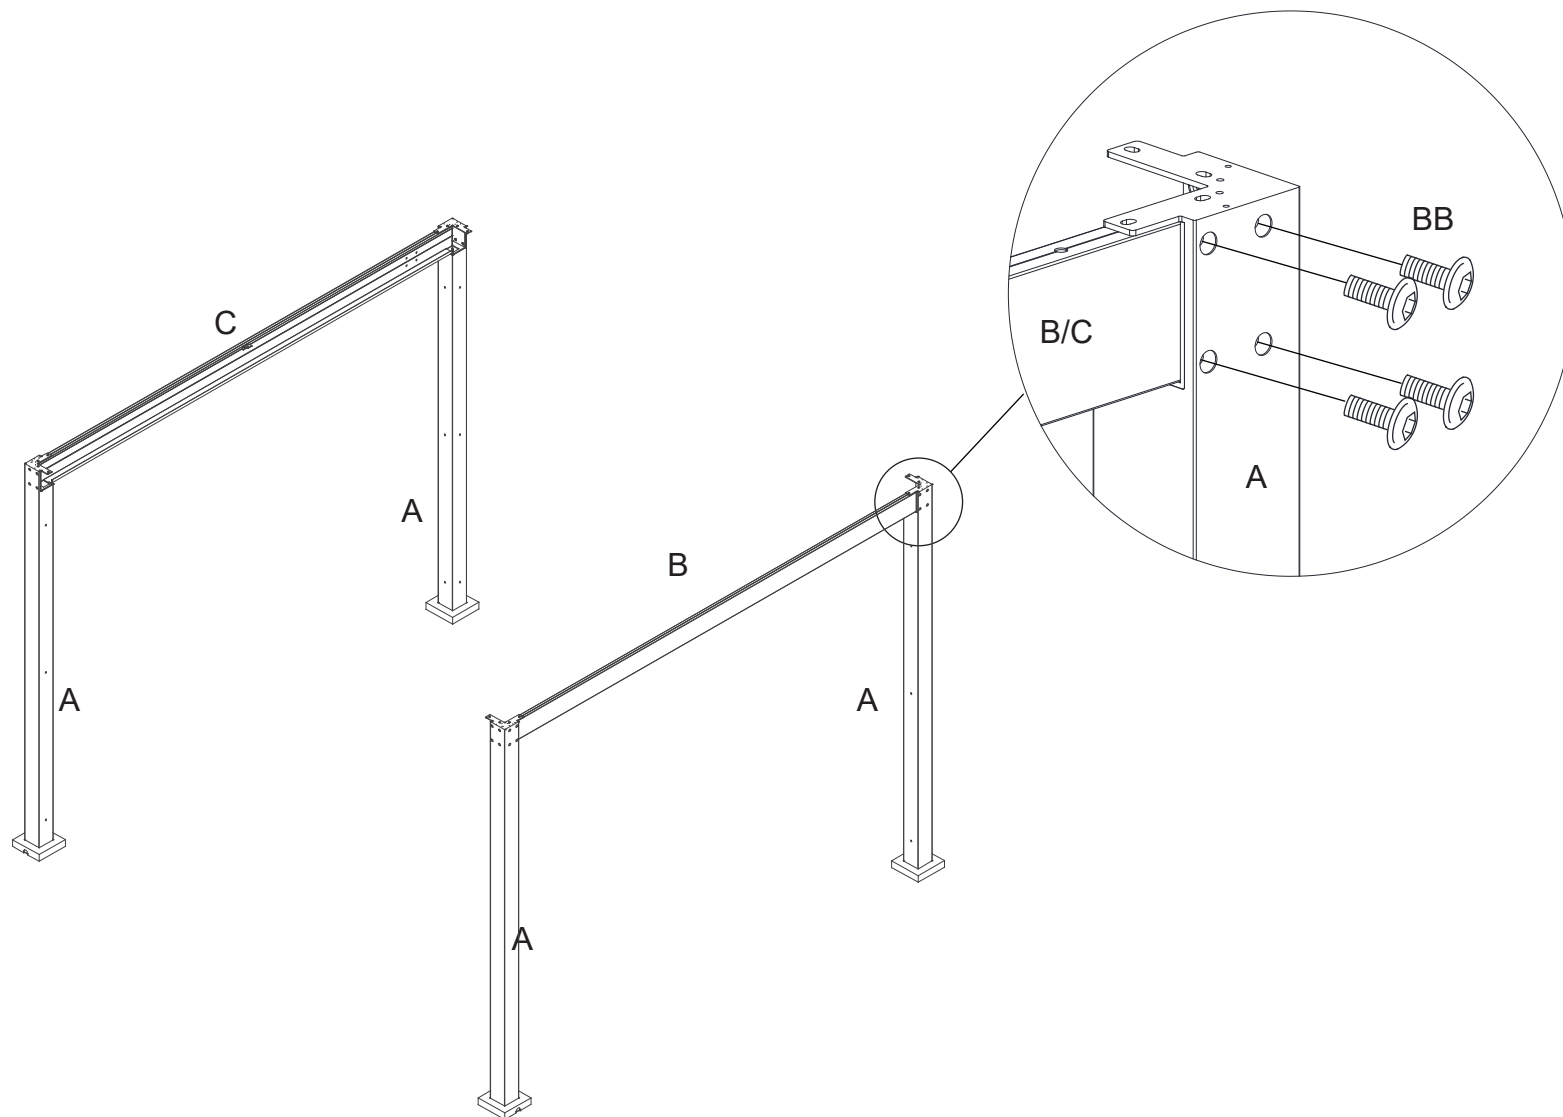

4



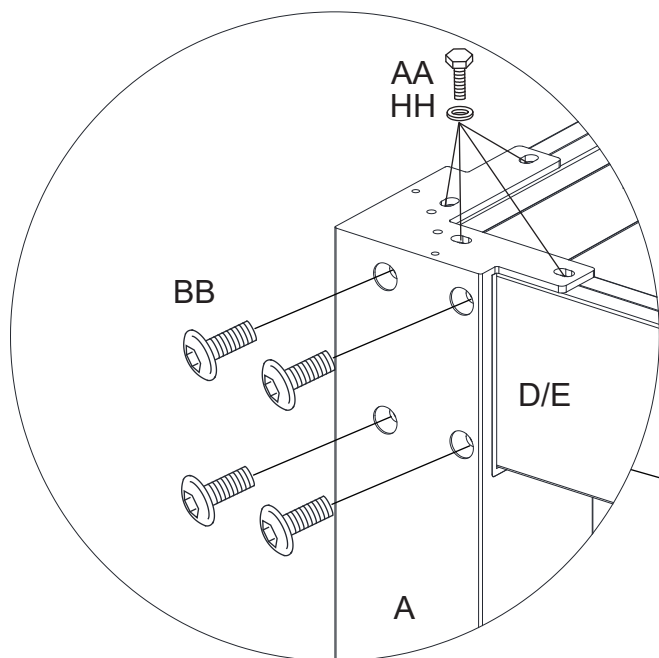



Fig 4

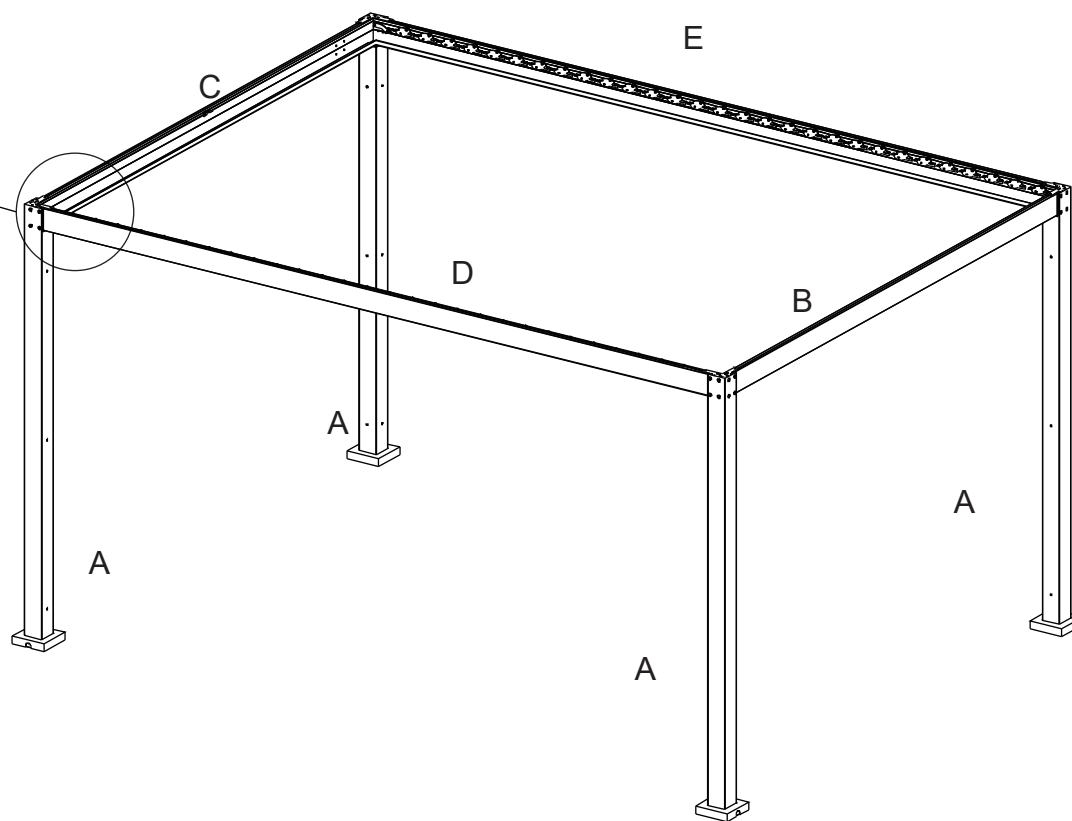





5

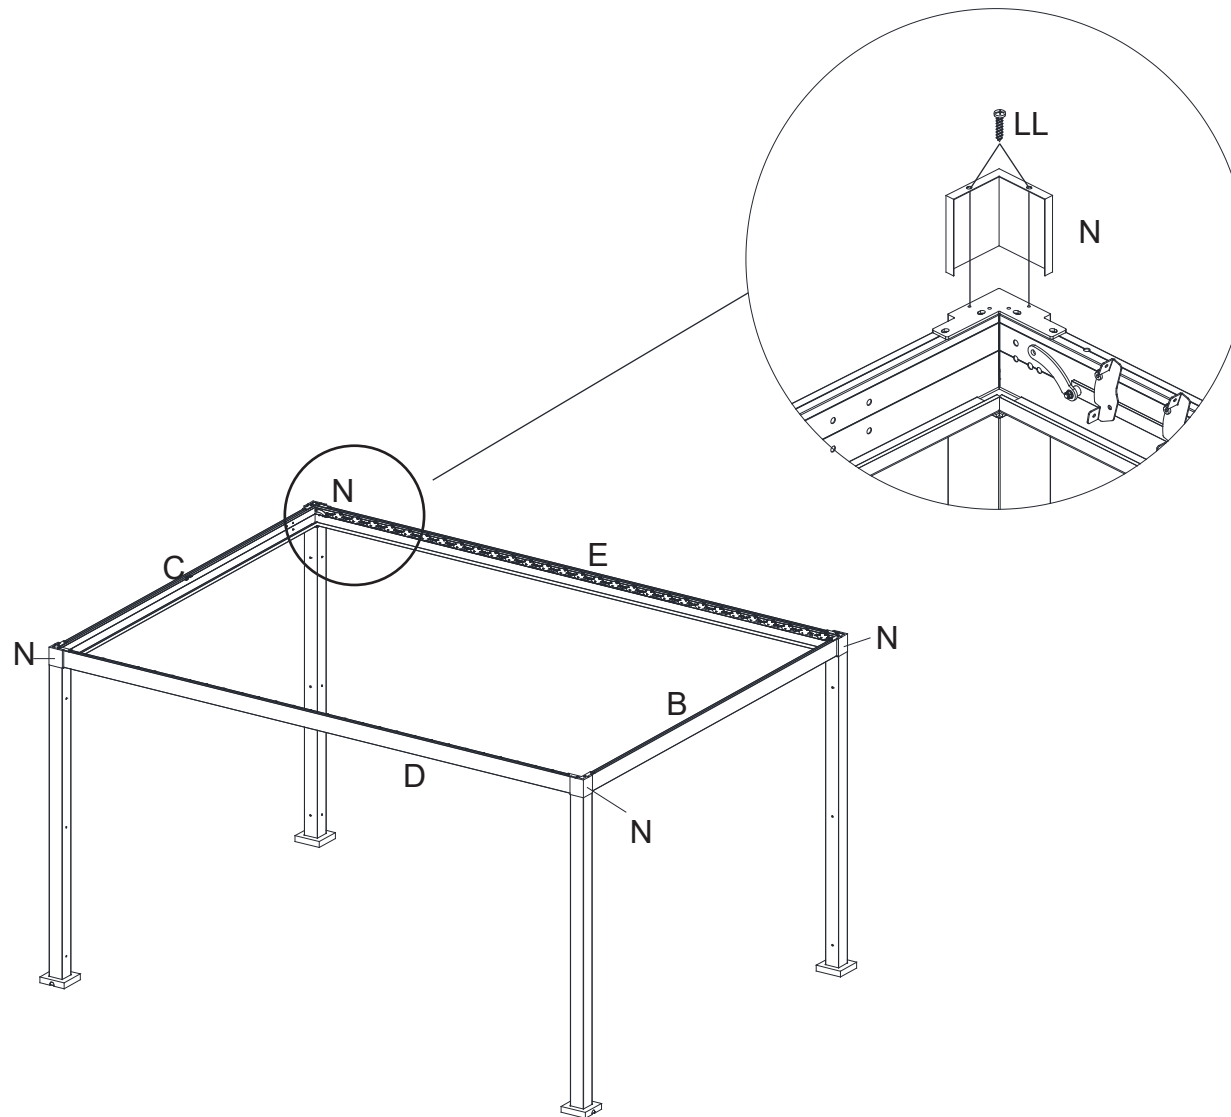






6

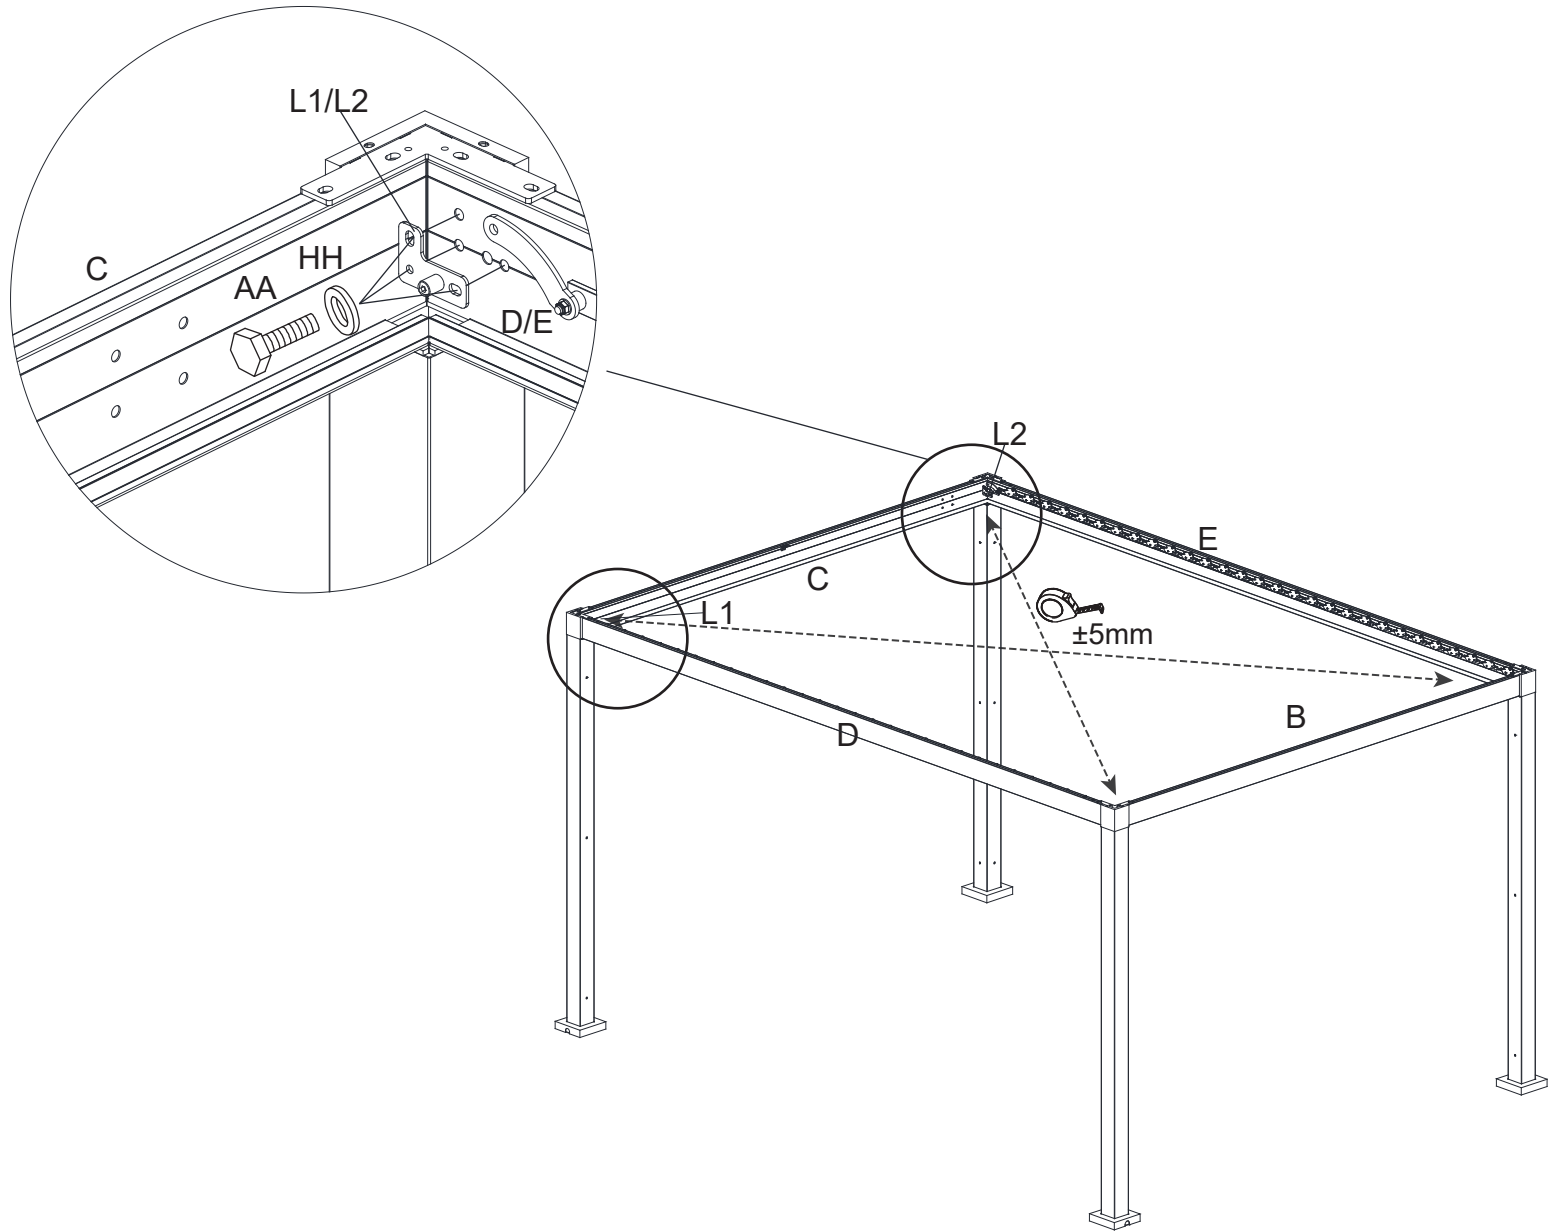




7

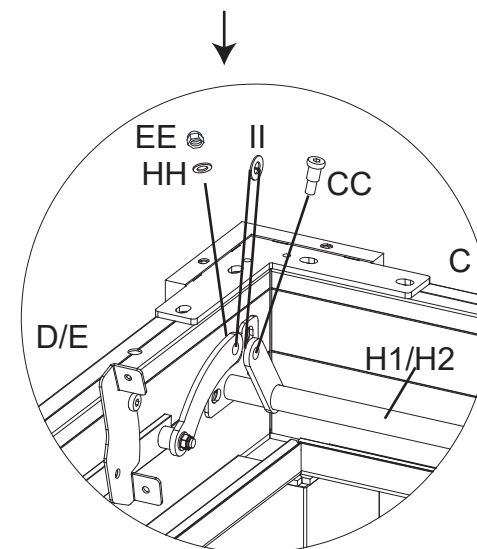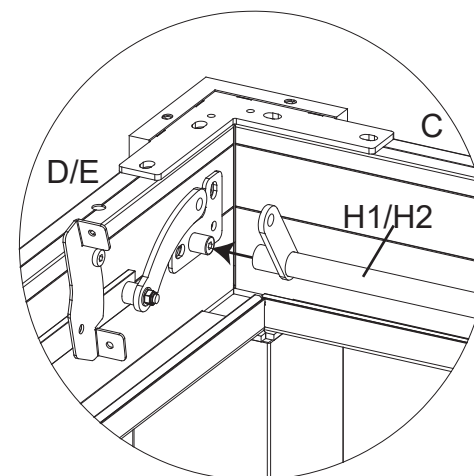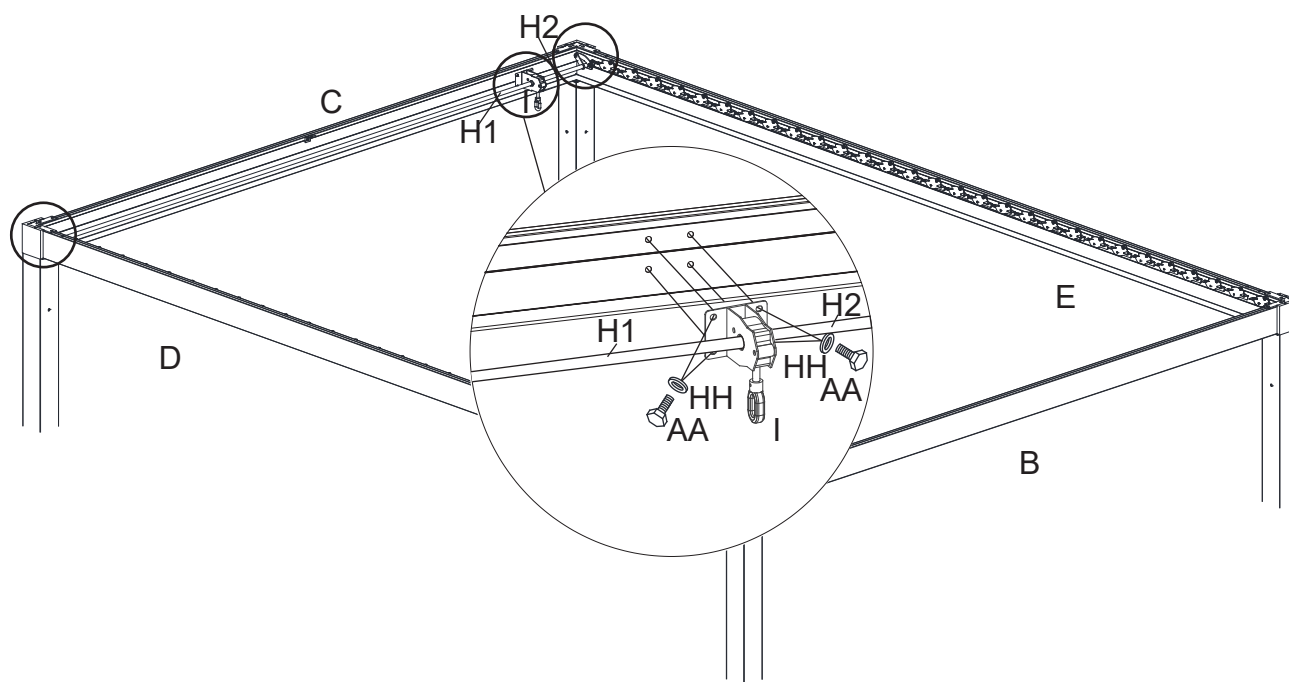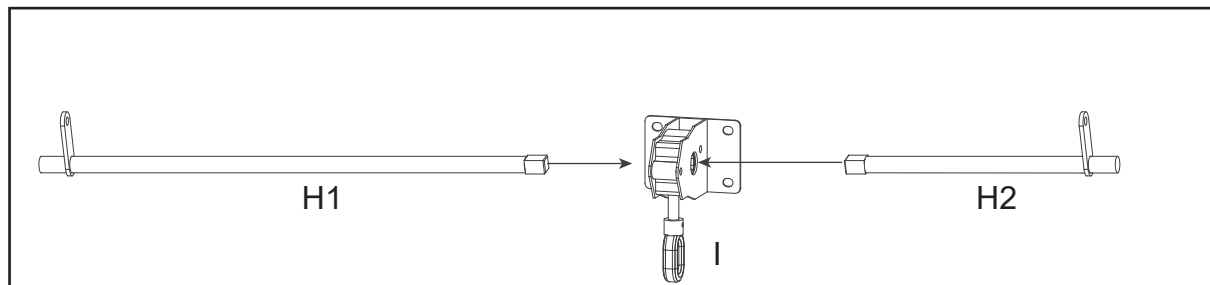


8

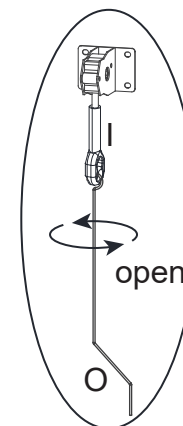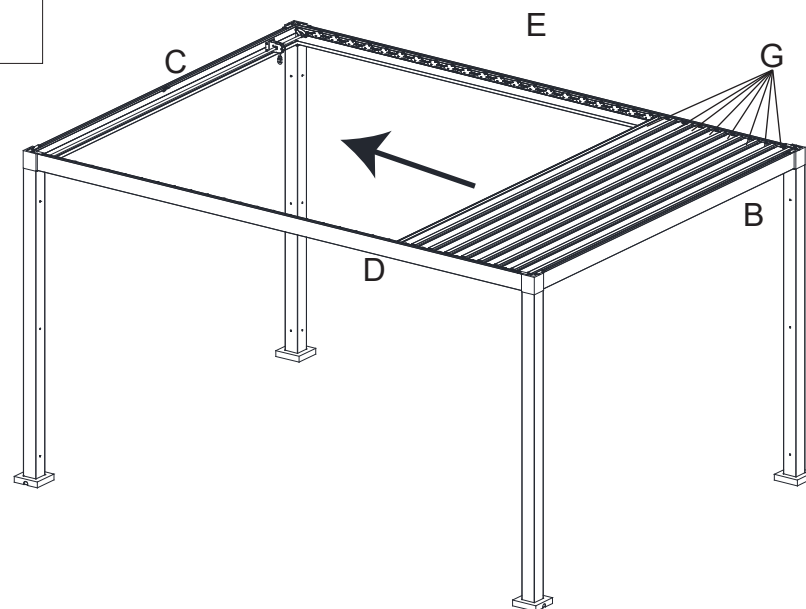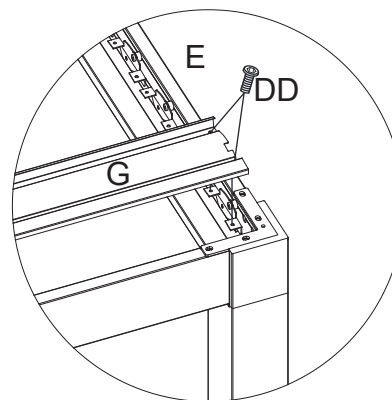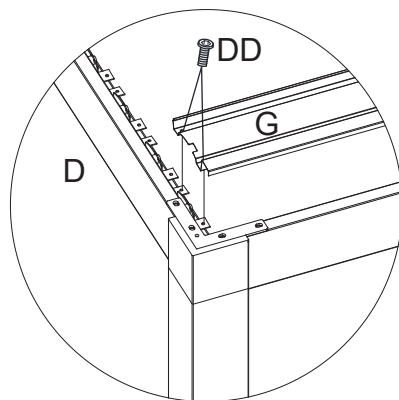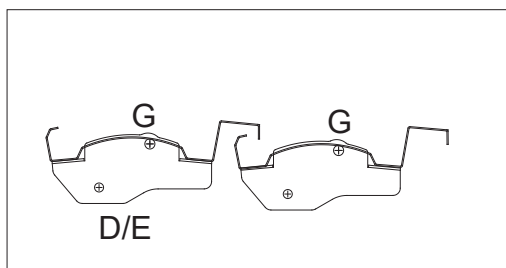


9

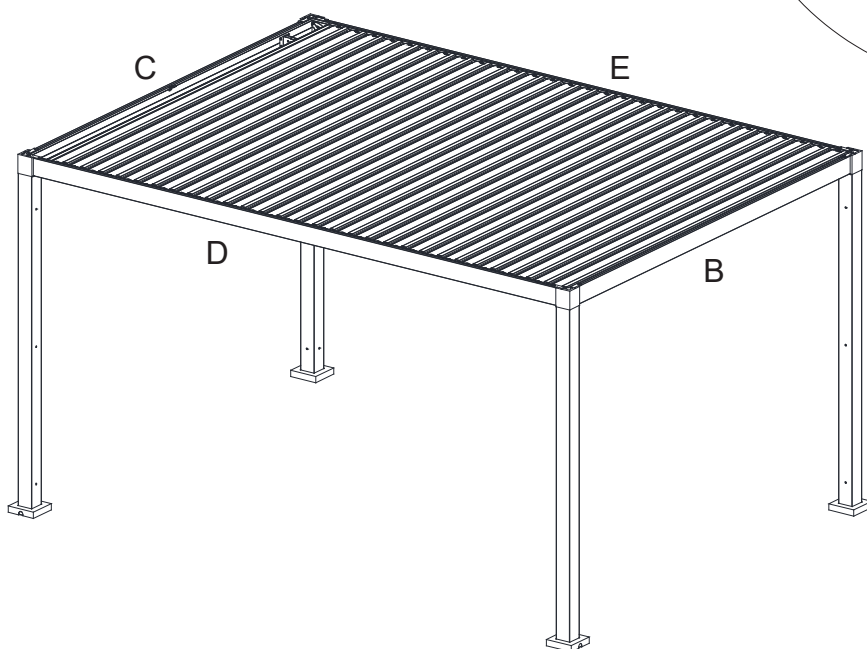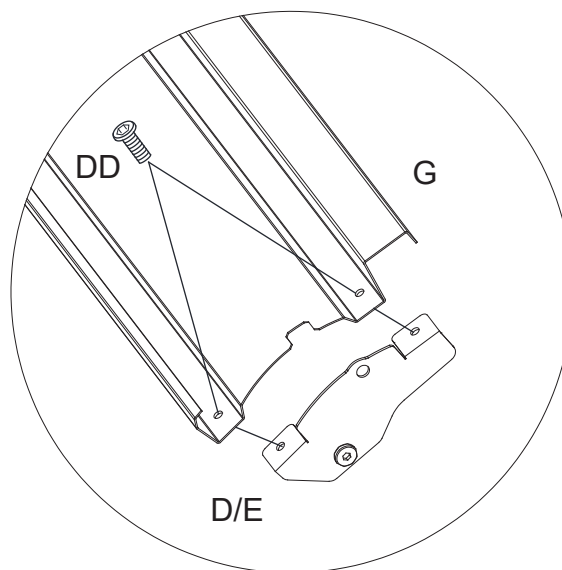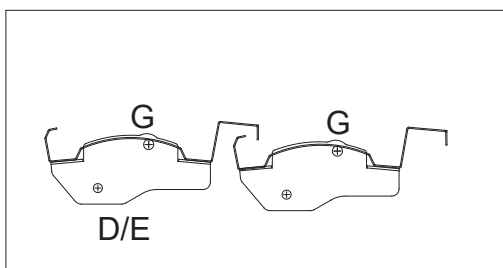

10

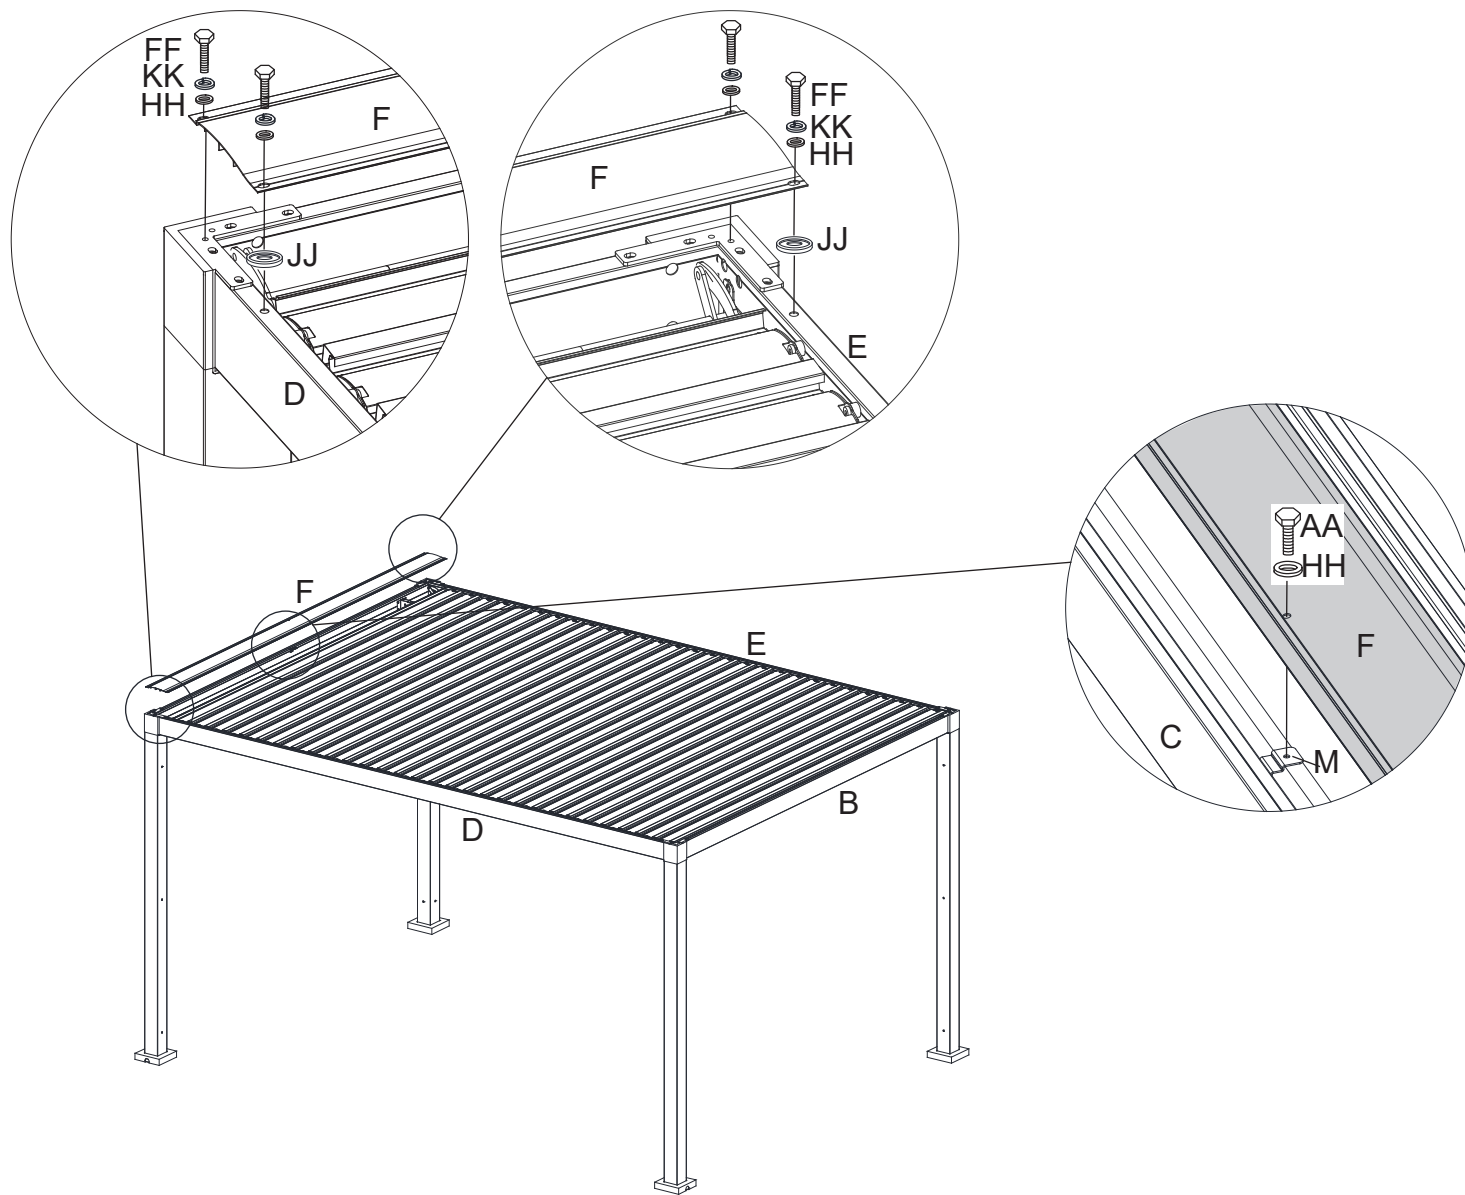

11

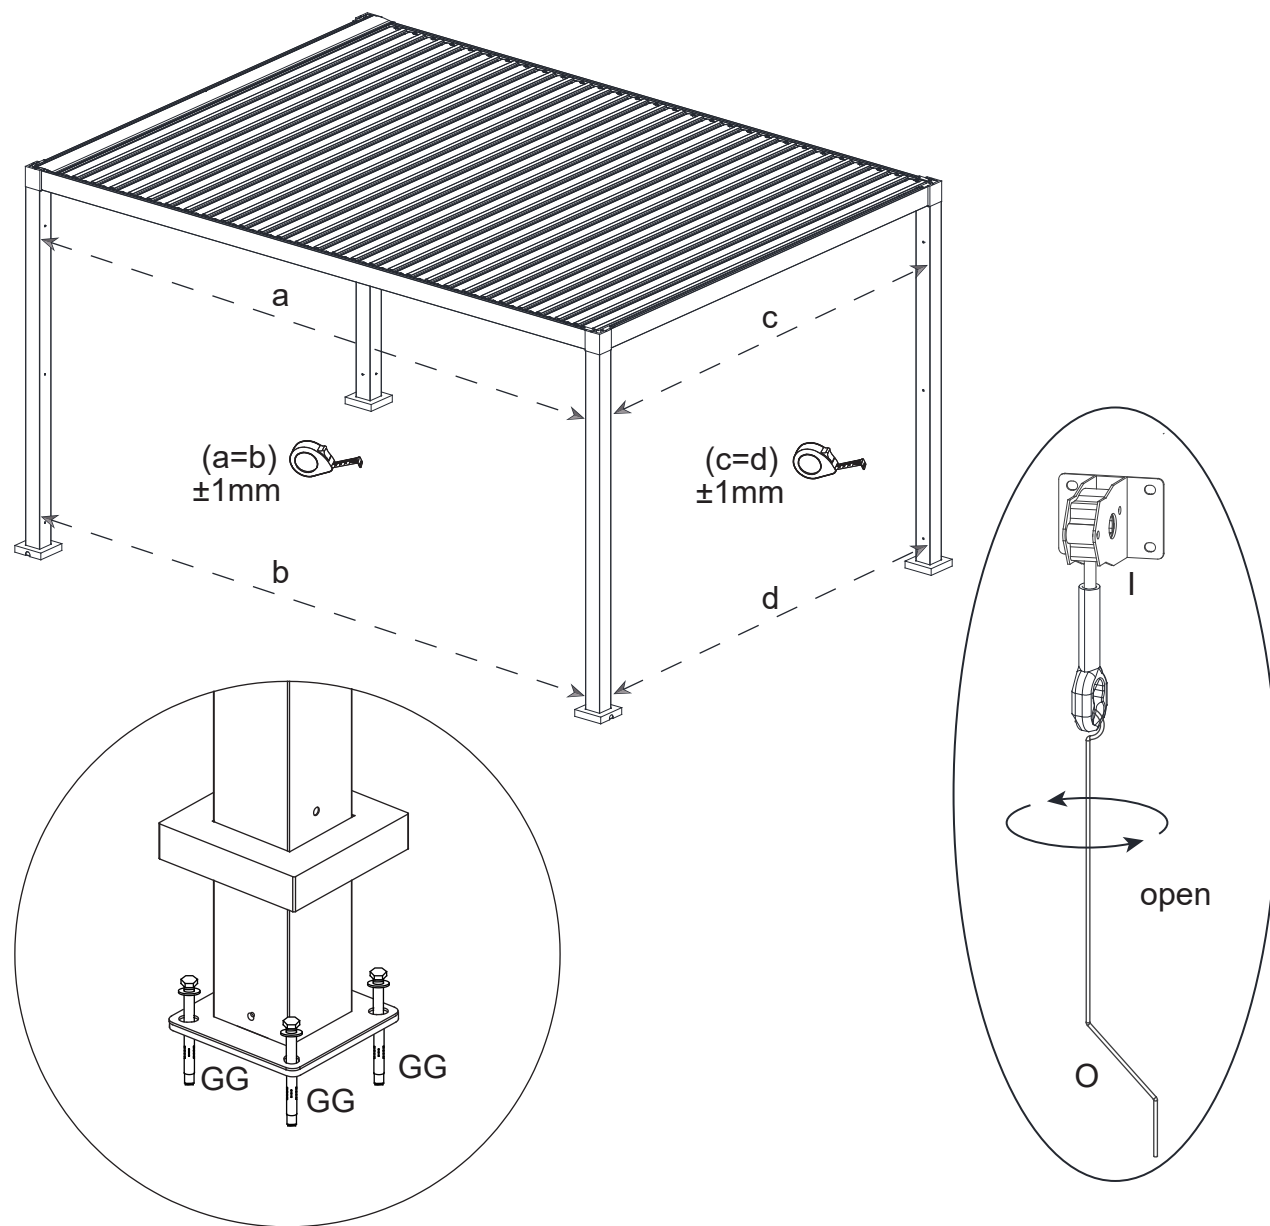

12

